

# TPC-DRT170D

**17.0" SXGA Panel PC with Intel Alder Lake -U; Front IP66 rated; 2 RJ45, 4 USB, 1 HDMI, 1 DP, 3 COM, 1 SW; Resistive Touch; DC 9~36V; 2 M.2 & 1 Mini-PCIe slots.**

Version: 3.0



## Features:

- Modular & Fanless designed, aluminum-magnesium alloy;
- Intel 12<sup>th</sup> Gen. Alder Lake-U Core i3/i5/i7 processors;
- 17.0" TFT LCD Display, LED Backlit, SXGA 1280\*1024;
- High temp. 5-wires resistive touchscreen, EETI controller;
- DC terminal, wide 9~36 V input range;
- 2 RJ45, 2 USB3.1, 2 USB3.0, 3 COM, 1 HDMI, 1 DP, Audio;
- 1 USB type-C (USB3.1 & DP1.4a), 1 SW Remote Switch;
- Intel PTT TPM2.0, Support Windows 11 OS;
- Panel mount, VESA 75/100 mount, Front IP66 rated protection;
- Optional 2 M.2 and 1 Mini-PCIe expansion slots.

## Specification




<b>Hardware &amp; System</b>	BIOS	SPI AMI EEI BIOS
	CPU	Intel 12 <sup>th</sup> Gen. Core i3-1215U, Core i5-1235U, Core i7-1255U
	Graphic	Intel UHD/Iris Xe Graphic
	Memory	2* SO-DIMM, Support DDR5-4800 MHz, Max. up to 64GB
	Storage	1* M.2 2280 M-Key slot (PCIe x4 Gen IV, NVMe) SSD, 1* M.2 2280 M-Key slot (NVMe/SATA) SSD, 1* SATA3.0 SSD
	Network	1* Intel I226 (2.5GbE), 1* Intel I219 (GbE) Network chips, optional 3G/4G/5G/Wi-Fi/BT, Wi-Fi6 wireless
	Audio	On-board Realtek ACL 897 Audio controller
	Expansion	1* M.2 (NGFF) B-Key 3042/3052 slot, 1* M.2 E-Key 2230 slot, 1* Mini-PCIe slot, 1* SIM Card slot
	Watch dog	0 ~ 256 seconds programmable
	Operating System	Win10 IoT 2021 LTSC; Win10 (21H2), Win11(21H2 or later); Linux Kernel 5.17 or later
<b>I/O Interface</b>	Ethernet	2 RJ45
	COM	COM1/2: RS232/RS485/RS422 (BIOS configured); COM3: RS232/GPIO
	Audio	Mic-in/Line-out (2 in 1, 3.5mm Jack)
	USB	2* USB3.1 (USB3.2 Gen2 x1, 10 Gbps), 2* USB3.0 (USB3.2 Gen1 x1, 5Gbps), 1* USB-C (USB3.1 & DP1.4a)
	Display	1* HDMI1.4 (Max. resolution to 4K@30Hz), 1* DP++ (Max. support 8K @30Hz)
	Power	1* 2 Pins, Phenix Terminal
<b>LCD Display</b>	Size/Type	17.0" TFT LCD Display
	Resolution	1280 * 1024 (SXGA)
	Brightness	250 nits
	Backlit & Lifetime	LED Backlit & 30K hours
	Display Area	337.92 * 270.336 (mm)
	View Angle	89/89/89/89
<b>Touchscreen</b>	Type	High temp. 5-wires precision resistive touchscreen
	Click Life	35 million times/250g
	Draw Life	5 million times/250g
	Surface Hardness	MOHS 6H
	Touch Controller	EETI
	Special Treatment	PET film laminated (Flat Design)
<b>Structure</b>	Structure & Surface	Magnesium-Aluminum alloy, sand blasting, anodized treated
	Cooling System	Large area finned heatsink (Fanless designed)
	Overall Dimension	386.5 * 323.5 * 59.0 (mm)
	Cut-out Dimension	376 * 313 (mm)
	Net Weight	4.7 KG
	Mount Method	Panel mount, VESA 75/100 Mount
	Operating temp.	0 ~ + 50 (°C)

# TPC-DRT170D

Power & Environmental		
	Storage temp.	-20 ~ + 60 (°C)
	Humidity	10 ~ 95% @ 10C (No condensation)
	Vibration	50 ~ 500 Hz, 1.5G, 0.15mm peak to peak
	Shock	10G/Peak (11 ms)
	Power input	Wide DC 9~36 V
	Power consumption	About 40W
	Certificate	CE/FCC/ROHS

DIMENSIONAL DRAWING:TPC-DRT170D

## Dimension (mm)

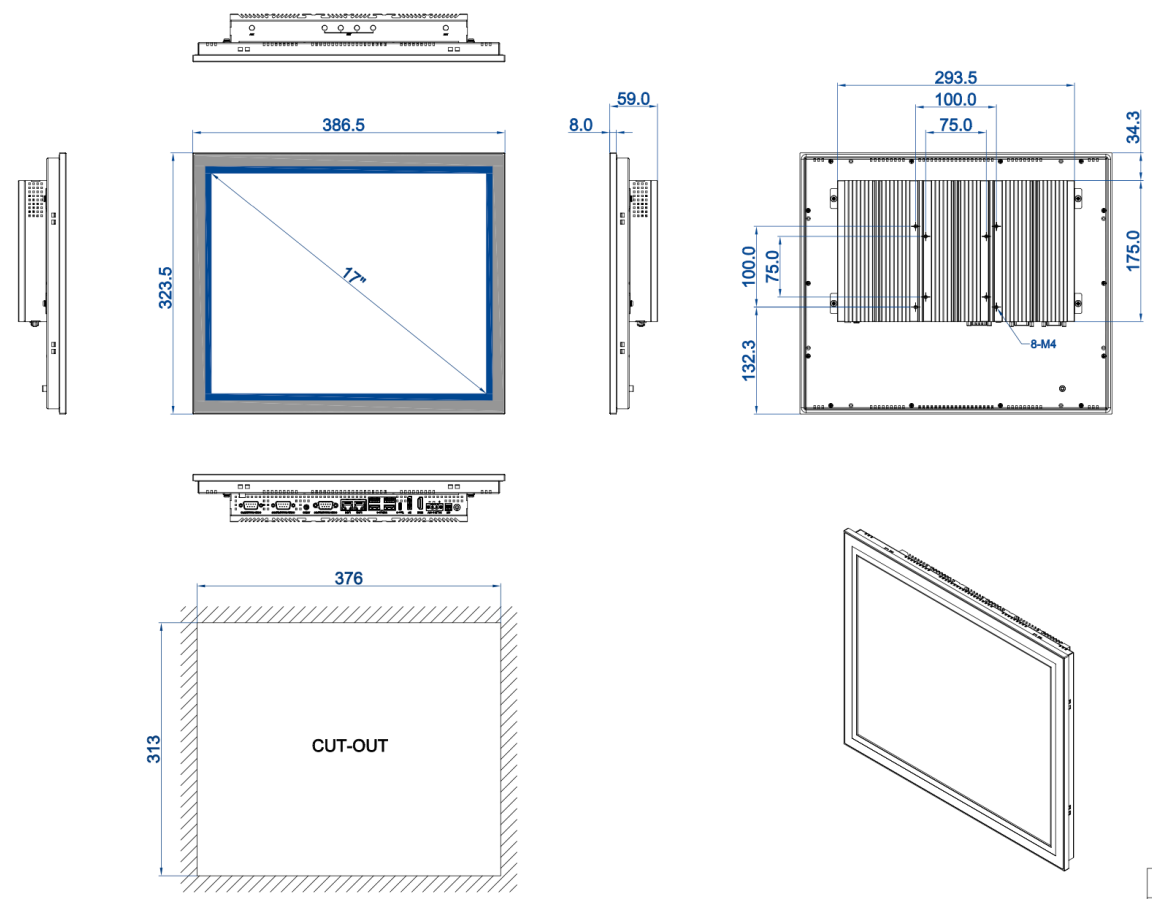

DIMENSIONS IN MILLIMETERS

TAICENN  
DATE:2024.09.26  
REV:B Unit:mm

## Ordering information

Part no.	Description		
TPC-DRT170D1	17.0" LCD, SXGA 1280 *1024, Intel Core i3-1215U, Resistive Touch, 2 RJ45, 2 USB3.1, 2 USB3.0, 1 USB-C, 1 HDMI, 1 DP, 3 COM, Audio, 1 SW, DC 9~36V, PSU		
TPC-DRT170D2	17.0" LCD, SXGA 1280 *1024, Intel Core i5-1235U, Resistive Touch, 2 RJ45, 2 USB3.1, 2 USB3.0, 1 USB-C, 1 HDMI, 1 DP, 3 COM, Audio, 1 SW, DC 9~36V, PSU		
TPC-DRT170D3	17.0" LCD, SXGA 1280 *1024, Intel Core i7-1255U, Resistive Touch, 2 RJ45, 2 USB3.1, 2 USB3.0, 1 USB-C, 1 HDMI, 1 DP, 3 COM, Audio, 1 SW, DC 9~36V, PSU		
Optional Accessories	Description	Packing List	
Memory	SO-DIMM, DDR5, <u>4GB/8GB/16GB/32GB/64GB</u>	Standard TPC-DRT170D Panel PC Product	1 set
Storage	SSD: <u>128GB/256GB/512GB/1TB</u>	PSU (90W Power Supply)	1 set
Wireless	Wi-Fi Module, with Antenna	Panel mount clips (Metal)	1 set (8 pieces)
	Wi-Fi Module with BT Integrated, With Antenna	Power Cable & Plug	1 set
	All Network 4G module, with Antenna		
	5G Network module, with Antenna		